




Features

- * 2 channel mixer of 10 inputs
- * Remote paging console T-319 as mic 1 with highest input priority
- * Mic 2-4 with VOX selector over inputs 5-10 and phantom power
- * All the 10 inputs with mic, line and high pass filtering selector
- * Inputs 7-10 either by XLR mic inputs or by dual RCA line inputs
- * Dual channel XLR line outputs
- * All inputs include inputs 1-10, MIC (remote paging console T-319), chime could be selected to have channel 1, channel 2 and channel 1+2 outputs.
- * Built-in 2/4 tone pre-set chime, remote chime trigger and local trigger on front panel
- * Volume controls are provided over chime, MIC 1, inputs 2-10, channel 1 and channel 2 masters. Bass and treble tone control are provided for both channel 1 and channel 2.
- * Indicators for input 1-10, power and 2 channel level meters
- * AC 110 or 230V and DC 24V operation

Specifications

Model	T-2S01
Input Sensitivity/Impedance	
MIC/ Line	$\pm 2.45\text{mV}/5\text{K}\Omega$ balanced, $\pm 245\text{mV}/5\text{K}\Omega$ balanced
Line RCA In	500mV/5K Ω unbalanced
Output Level/Impedance	
Master 1, 2	+4dBu/200 Ω balanced
REC	0dBu/10K Ω unbalanced
Frequency Response	
Less Than	-1dB(20Hz~20KHz)
S/N Ratio	
MIC	More than 60dB
Line	More than 75dB
THD	
MIC	Less than 0.05%
Line	More than 0.03%
Cross-talk	
MIC	More than 60dB
Line	More than 75dB
Power Consumption Power	13W
Power Supply	$\sim 110\text{V}/60\text{Hz}$ or $\sim 230\text{V}/50\text{Hz}$ & DC 24V
Dimensions	484x295x44mm
Weight	3.9Kg

Rear Panel T-2S01

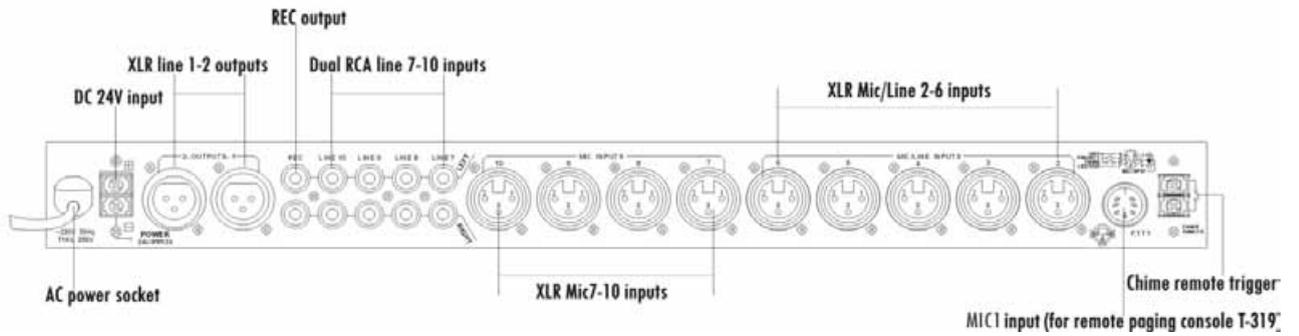

Connections

