

# T-208S Ceiling Subwoofer (60W, 100V & 80hms)

#### **Features**

- Built-in 100v/70v transformer
- In-ceiling type subwoofer
- 8" speaker unit
- Power taps 3.8w-7.5w-15w-30w-60w @100V
- Line inputs of 100V, 70V and 8ohms
- Metal grille, ABS baffle & ABS back cover
- Paint in RAL9016 white



The T-208S is a ceiling subwoofer built-in 70v/100v transformer. The 70v/100v transformer technique reduces line losses on longer distance and allows easy parallel connection of multiple loudspeakers. The subwoofer is designed of multi-line inputs at 100V, 70V and 80hms.

The subwoofer works together with the passive loudspeaker like T-208 or T-208CW would be superior union for bar, disco, entertainment & karaoke application where have a strict requirements of bass response.



The built-in 8" speaker driver is designed of wide frequency response 60-2kHz, the multiple power taps 3.8W, 7.5W, 15W, 30W & 60W are helpful for different applications varies from room size and ambient noise surroundings. The metal grille, ABS baffle and ABS back cover are painted in attractive RAL9016 white color. Its flush mount type makes the easy and secure installation.

### **Specification**


Model	T-208S
Power Taps @100V	3.8W, 7.5W, 15W, 30W, 60W
Power Taps @70V	1.9W, 3.8W, 7.5W, 15W, 30W
Input	70V/100V/8Ω
Impedance	Com/5.3KΩ/2.6KΩ/1.3KΩ/670Ω/330/165Ω
SPL(1W/1M)	90dB
Max. SPL (Rated W/1M)	107dB
Frequency Response (-10dB)	60-2KHz
Finish	Baffle: Steel, White Grille: Steel, White
Speaker Driver	6.5" ×1
Cutout Size	250mm
Dimensions	280 ×190mm
Weight	3.5Kg
Mounting	Flush-mount dog ears

Website: www.itc-pa.com.cn; Mail: info@itc-pa.com.cn



# I-208S Ceiling Subwoofer (60W, 100V & 80hms)

#### Appearance:

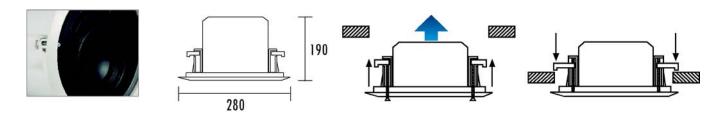

## **Frequency Response**

