




Voice Evacuation Microphone

VA-WFM

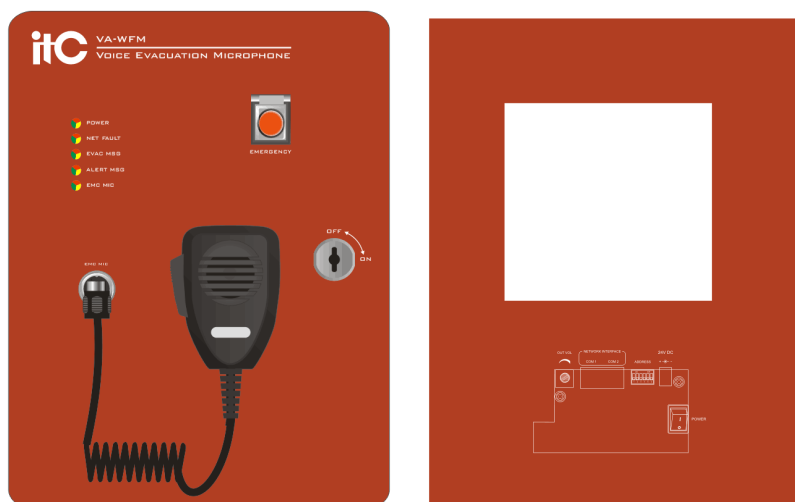

Description

- * Paging to all zones in the system;
- * Enter into or exit the emergency mode;
- * Support fireman mic recording function;
- * Support self detection in paging conflict status;
- * Can display the EVAC/ALERT audio source status;
- * Same priority of fireman mic and PTT mic;
- * Support power supplied by 24V DC and network cable;
- * Support max 4pcs fireman mics.

Specifications

Model	VA-WFM
Power supply	Voltage ~ DC 24V battery
	24V network port
Mic input	
Sensitivity	5MV±0.5mV
Frequency response	200Hz~10kHz
Input impedance	≥ 1kΩ
CAN interface	CAN interface of remote mic
	Baud rate of 100bps
	Support up to 4 fireman mic
Size (L×W×H)	260×200×100mm
Net weight	2.3Kg
Installation	Wall mounted
Color	Grey
Operating temperature	+5℃ ~ +40℃
Storage temperature	-20℃ ~ +70℃
Relative temperature	<95%