

T-208F Hi-fi Ceiling Speaker(Coaxial Constant Impedance)

Features

- Low impedance 8 Ω input ceiling loudspeaker
- 8" +1.5" coaxial fiber speaker unit
- Hi-fi level speaker for home use
- RMS 30W and MAX 60W power output
- Built-in crossover
- Metal grille & ABS baffle
- Paint in white color
- Flush mount secure installation



Description

The T-208F is a low impedance 8Ω input ceiling mount speaker, it is built-in 8"+1.5" coaxial fiber speaker driver and a crossover is equipped to achieve hi-fi level sound performance of frequency response

60-18kHz, and the RMS 30W and MAX 60W power output are suitable for foreground and background music system.

The metal grille and ABS baffle are painted in attractive white color. Its flush mount type makes the easy and secure installation.

The hi-fi sound quality and excellent frequency response make it is ideal choice for residential and commercial applications in hotel, school, office and factory where background music and paging is needed.

Specification


Model	T-208F
Rated Power	30W
Max Power	60W
Impedance	Black: Com Red: 8Ω
SPL(1W/1M)	92dB
Max. SPL (Rated W/1M)	108dB
Frequency Response (-10dB)	60-18KHz
Finish	Baffle: ABS, White Grille: Steel, White
Speaker Driver	8" x 1 1.5" x 1
Cutout Size	248mm
Dimensions	280 x 100mm
Weight	1.8Kg
Mounting	Flush-mount dog ears

Website: www.itc-pa.com.cn; Mail: info@itc-pa.com.cn




T-208F Hi-fi Ceiling Speaker(Coaxial Constant Impedance)

Appearance:

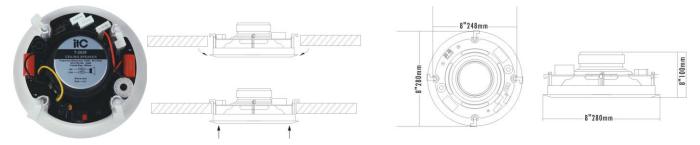

Direction Diagram:

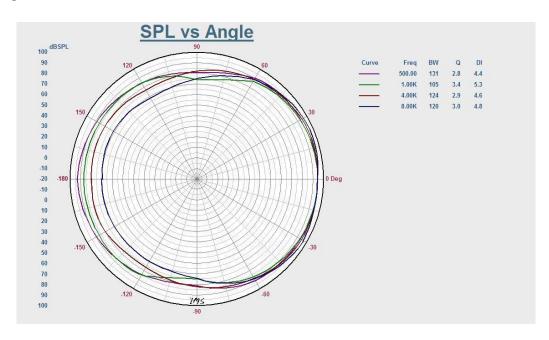

Frequency Response:



Website: www.itc-pa.com.cn; Mail: info@itc-pa.com.cn