

Descriptios

This unit is used to automatic power supply to volume control when fire alarm system is activated but the volume level is off. It will be used together with T-6223(A) fire alarm system when volume control is needed.

Features

- * 10 groups of 24V compulsive power supply
- * Total power output up to 250W
- * Single group max power output up to 150W
- * Support control up to 500pcs volume control with compulsive cut function
- * Support expansion to 300 zones max
- * A/B channel alarm inputs and A/B channel alarm outputs
- * Several units work together after pre-set dipswitch
- st 2 RJ45 communication port with fire alarm system or cascade another unit


Optional

- * Panel without handhold
- * With DC 24V

Specifications

Model	T-6211(A)
Power Supply	~110V/60Hz or ~230V/50Hz
Power Consum	220W
Communication Protocol	RS422
Communication Input	RJ45
Communication	4800bps
Dimension	484x303x88mm
Weight	7.5Kg

All zone voice alarm dry contact output

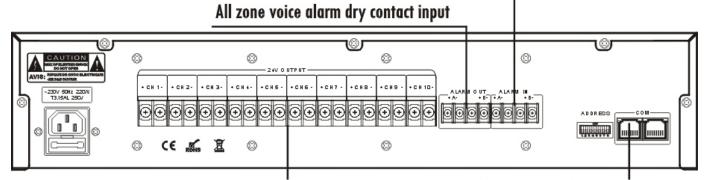

DC 24V relay for volume control

T-6211(A)/T-6212(A)/T-6223(A)/T-218(A)