

T-103E Water-Resistant Wall Mount Speaker (1.5W-3W)

Features

- Built-in 100v/70v transformer
- Wall mount and surface mount type loudspeaker
- 3" full range water-resistant speaker unit
- IP66 water-resistant level
- Power taps 1.5w-3w @100V
- ABS enclosure and ABS grille in white

Description

The T-103E is a water-resistant wall mount speaker built-in 70v/100v transformer. The 70v/100v transformer technique reduces line losses on longer distance and allows easy parallel connection of multiple loudspeakers.



The built-in 3" full range water-resistant speaker driver is designed of

wide frequency response 80-16kHz, the multiple power taps 1.5W & 3W are helpful for different applications varies from room size and ambient noise surroundings. The ABS enclosure and ABS grille are of white color. Easy and secure wall mount installation through the supplied mounting holes

It is specially designed for bathroom, clean room, washing room, sauna room and corridor applications where is humid.

Specification

Model	T-103E
Power Taps @100V	1.5W, 3W
Power Taps @70V	0.75W, 1.5W
Impedance	Black: Com, Blue: 6.7K Ω , White: 3.3K Ω
SPL(1W/1M)	89dB
Max. SPL (Rated W/1M)	94dB
Frequency Response (-10dB)	80-16KHz
Finish	Baffle: ABS, White Grille: ABS, White
Speaker Driver	3"
Dimensions	120 x120 x60mm
Weight	0.5Kg
Mounting	Hook




T-103E Water-Resistant Wall Mount Speaker (1.5W-3W)


Appearance:



Direction Diagram:

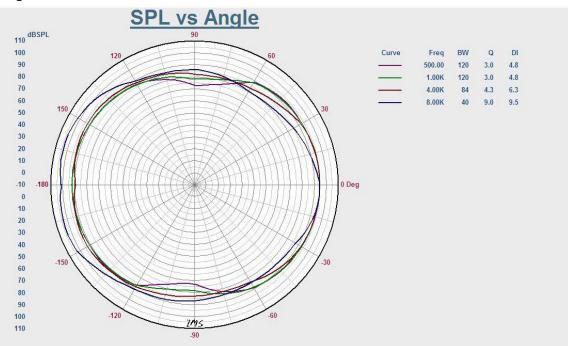

Frequency Response:

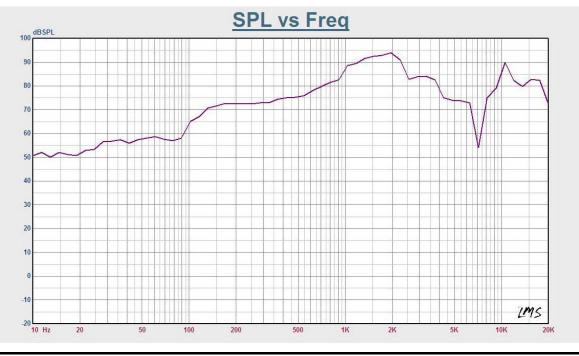

Website: www.itc-pa.com.cn; Mail: info@itc-pa.com.cn